


ELEVATOR TRAVELLING CABLES

FH – PVC

Elevator travelling cable – High rise

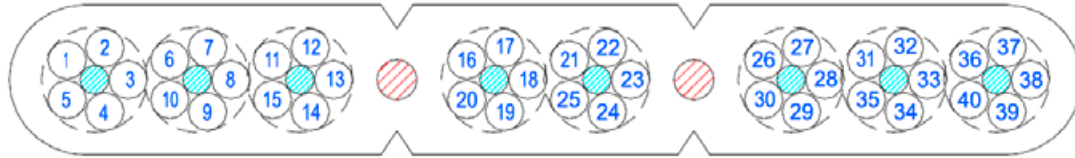

PRODUCT INFORMATION

APPLICATION	Elevator travelling cable for indoor and panoramic elevators	
INSTALLATION	Installation Follow instructions in Datwyler manual for proper handling and installation Suspension device: LZ 4001 Loop diameter: natural loop	
CONSTRUCTION	Conductors: Insulation: Support members: Outer sheath:	flexible bare Cu strands class 5 acc. to IEC/EN 60228 PVC steel ropes, Ø 2.5 mm PVC
MECHANICAL PROPERTIES	Free suspension length: Travel speed: Operating temperature: Overall dimension (approx.): Total weight (approx.): Copper content:	max. 220 m max. 12 m/s -15 to +70 °C 69,0 x 9,6 mm 1103 kg/km 309 kg/km
ELECTRICAL PROPERTIES	Rated voltage U_0/U :	300/500 V
PROPERTIES OF DATA ELEMENTS	no data elements	
FIRE PERFORMANCE	Flame propagation:	IEC/EN 60332-1-2
COLOUR CODE	Cores: Outer sheath:	black, white numbered 1-40 grey
STANDARD	With reference to EN 50214	

Article no.	Type	No./size of conductors
157219	7877-F	40 x 0.75 mm ²