


ELEVATOR TRAVELLING CABLES

FL – PVC

Elevator travelling cable – Low rise

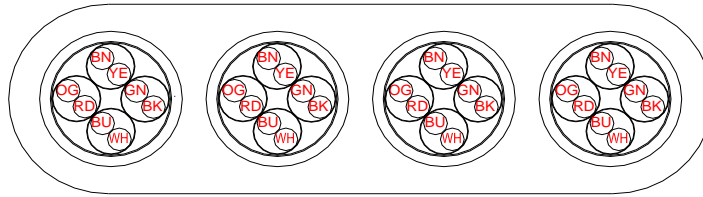

PRODUCT INFORMATION

APPLICATION	Elevator travelling cable for indoor and panoramic elevators. Supports all Cat.6/Class E applications (e.g. 10 Base-T, 100 Base-T, 1000 Base-T, ISDN). Max. channel length 65 m (transceiver to receiver).	
INSTALLATION	Follow instructions in Datwyler manual for proper handling and installation Suspension device: LZ 1006 Loop diameter: natural loop	
CONSTRUCTION	Pairs AWG 26: Support members: Outer sheath:	PE, Al/PETP foil, overall tinned Cu braid shield (S/FTP) none PVC
MECHANICAL PROPERTIES	Free suspension length: Travel speed: Operating temperature: Overall dimension (approx.): Total weight (approx.): Copper content:	max. 45 m max. 4 m/s -15 to +70 °C 29.6 x 8.4 mm 332 kg/km 70 kg/km
ELECTRICAL PROPERTIES	Rated voltage U_0/U : Pairs AWG 26:	100/100 V
PROPERTIES OF DATA ELEMENTS	Pairs AWG 26:	see type HF-4367-F
FIRE PERFORMANCE	Flame propagation:	IEC/EN 60332-1-2
COLOUR CODE	Pairs AWG 26: Outer sheath:	white/blue, red/orange, black/green, yellow/brown (4x) grey
STANDARD	With reference to EN 50214	

Article no.	Type	No./size of conductors
191032	8867-F	4 x 4 x 2 x AWG 26 (S/FTP)